




This is a **tool** for lock nut with slots on its external diameter.

It is used for the correct assembly of sleeves and nuts, thus avoiding chisel or hammer blows to tighten the nut, which is one of the greater causes for reduction of the working life of bearings.

Material: Carbon steel SAE 1045 with heat treatment and finished with black oxidation.

HOOK SPANNERS HN

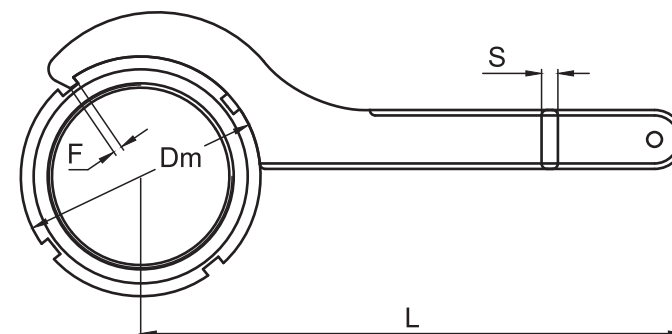

HOOK SPANNERS

Part Number	Dm (mm)	F (mm)	L (mm)	S (mm)	Weight (Kg)
HN 1	22	2.0	120	4.7	0.06
HN 2	25	2.5	120	4.7	0.06
HN 3	28	2.5	120	4.7	0.06
HN 4	32	2.5	120	4.7	0.06
HN 5	38	3.0	150	4.7	0.09
HN 6	45	3.5	180	6.3	0.18
HN 7	52	3.5	180	6.3	0.19
HN 8	58	4.0	210	8	0.31
HN 9	65	4.0	210	8	0.3
HN 10	70	4.0	210	8	0.31
HN 11	75	4.0	210	8	0.31
HN 12	80	5.0	240	8	0.42
HN 13	85	5.0	240	8	0.42
HN 14	92	5.0	240	8	0.41
HN 15	98	5.0	240	8	0.4
HN 16	105	5.0	240	8	0.39
HN 17	110	5.0	280	12.7	1.01
HN 18	120	5.0	280	12.7	0.94
HN 19	125	5.0	280	12.7	0.95
HN 20	130	5.0	280	12.7	0.95
HN 21	140	6.0	320	12.7	1.30
HN 22	145	6.0	320	12.7	1.27
HN 23	148	10.0	394	12.7	1.59
HN 24	153	10.0	416.5	12.7	1.69
HN 25	158	10.0	429	12.7	1.8
HN 26	163	10.0	436.5	12.7	1.79
HN 27	173	12.0	451.5	15.8	2.22
HN 28	178	12.0	464	15.8	2.11
HN 29	188	12.0	484	15.8	2.66
HN 30	193	12.0	496.5	15.8	2.8
HN 31	198	13.0	509	15.8	2.98
HN 32-HN 33	208	13.0	519	15.8	3.6
HN 34	218	13.0	544	15.8	2.81
HN 36	228	15.0	564	15.8	3.76
HN 38	238	15.0	584	15.8	4.23
HN 40	248	15.0	604	15.8	4.53
HN 44	278	15.0	634	15.8	5.03